




Dewatering Pumps

HD/HDG/BD


50Hz
SERIES

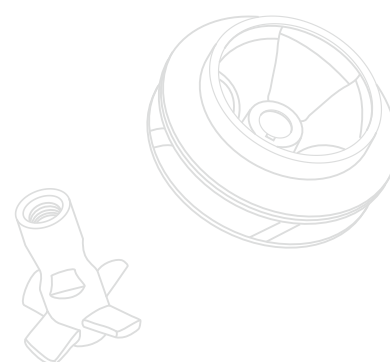

HD

FEATURES

- Compact, robust and easy handling for all construction and civil engineering dewatering application conditions.
- Stainless steel (SUS304) outer casing, the self-cooling motor is suitable for continuous duty and low water level conditions.
- Standard accessories include the cable with an epoxy resin sealed water-resistant cable base, Auto-cut motor protector, double mechanical seals, oil seal design, and High Solid Epoxy coating.
- High efficient special impeller design in High Chrome Alloy steel (HiCrFC), with a hardness of 55 - 60 Rockwell, to stand high abrasive applications.
- The pump internal castings are all protected by the high solids epoxy coating, which can prolong the metal life and avoid corrosion and oxidation.
- The mechanical seal bracket is covered by EPDM with anti-abrasive wear for HD 15~20HP models.
- Optional ADTC (Adapter Connection) Casing to connect suction with inline pipe, allowing surface/inline/deep well pumping.



Open Impeller




Close Impeller

APPLICATIONS

- Civil engineering, dewatering, tunneling, groundworks, mining, and manhole sewer.
- Industrial wastewater dewatering of fluids containing solid sediments.
- Portable use for contractors, installers, and industry.


PRODUCT NOMENCLATURE

100	HD	2	5.5
Discharge mm	Type	Pole	kW

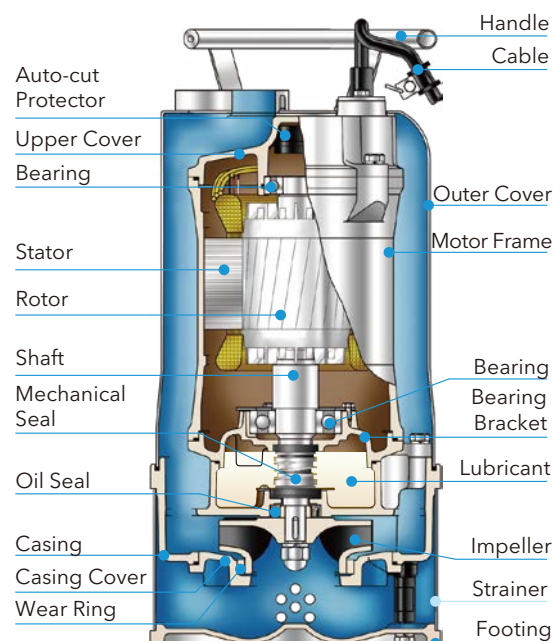



PERFORMANCE CURVES

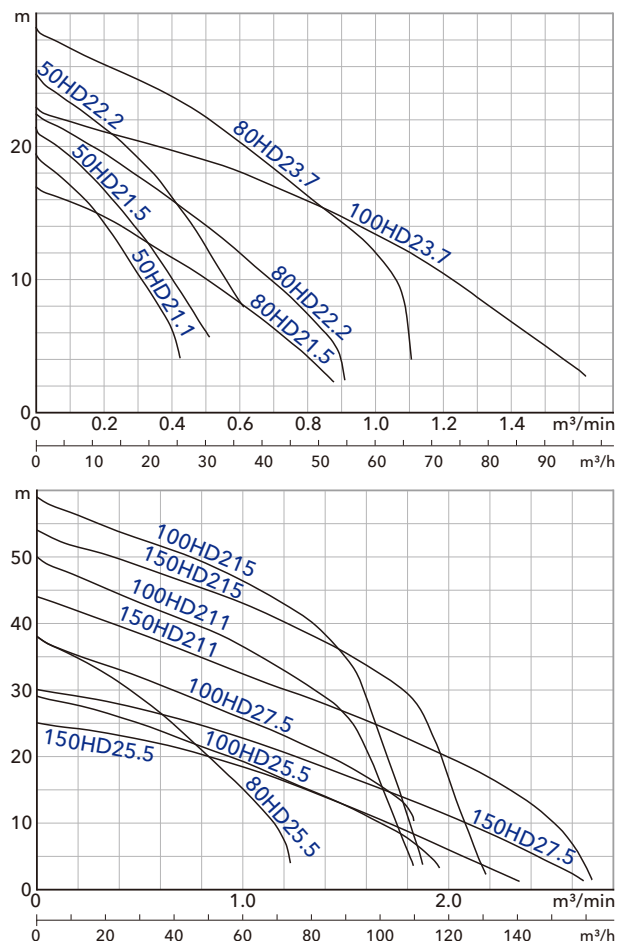


SPECIFICATIONS

Item	Description	
Limits of Use	Liquid Temp.	0~40°C (32~104°F)
	Applications	Construction sites • Basins dewatering
Type	Frequency	50Hz
	Motor	2P (3000rpm) • Dry Motor
	Insulation	Class F (1.5~5HP) • Class H (7.5~20HP)
	Protection	IP68
	Protector	Auto-cut
	Bearing	Ball type
	M.seal	Double M.seals
Material	Impeller	Open • Close
	Outer Cover	SUS304
	Upper Cover	FC200
	Motor Frame	SUS304 (1.5HP) • FC200 (2~20HP)
	Shaft	SUS403 (1.5~3HP) • SUS304 (5~10HP) • SUS420J2 (15~20HP)
	M.seal	CA/CE & SiC/SiC
	Casing	FC200 (1.5~10HP) • FCD500 (15~20HP)
	Impeller	HiCrFC
	Wear plate	HiCrFC (For Open)
	Wear ring	HiCrFC (For Close)
	Cable	VCT or H07RN-F
Optional		Pumps can be customized to fit specifications Floating Switch (1.5~3HP 1Ø)

PERFORMANCE SPECS.

※ Note : Weight Without Cable & Outlet.

Model	Output HP(kW)	Discharge Inch(mm)	Phase Ø	Start Method	Head m	Standard		Solid Passage mm	Weight kg		Dimensions mm					
						m³/min	m³/h		1Ø	3Ø	A	B		C		
50HD21.1	1.5(1.1)	2"(50)	1/3	Capacitor DOL	13.5	0.2	12	7.5	28	24	210	1Ø	3Ø	1Ø	3Ø	
50HD21.5	2(1.5)	2"(50)	1/3	Capacitor DOL	15	0.25	15	10	40	36	235	511	466	465	421	
50HD22.2	3(2.2)	2"(50)	1/3	Capacitor DOL	19	0.3	18	10	44	39	235	541	466	496	421	
80HD21.5	2(1.5)	3"(80)	1/3	Capacitor DOL	10	0.5	30	10	40	36	235	511	466	465	421	
80HD22.2	3(2.2)	3"(80)	1/3	Capacitor DOL	14	0.5	30	10	45	39	235	541	466	496	421	
80HD23.7	5(3.7)	3"(80)	3	DOL	22	0.5	30	10	-	44	235	-	496	-	451	
100HD23.7	5(3.7)	4"(100)	3	DOL	13	1.0	60	10	-	44	235	-	511	-	465	
80HD25.5	7.5(5.5)	3"(80)	3	DOL	28	0.5	30	10	-	72	286	-	610	-	550	
100HD25.5	7.5(5.5)	4"(100)	3	DOL	19	1.0	60	10	-	75	286	-	610	-	550	
150HD25.5	7.5(5.5)	6"(150)	3	DOL	12	1.5	90	10	-	78	286	-	610	-	550	
100HD27.5	10(7.5)	4"(100)	3	DOL	25.5	1.0	60	10	-	80	286	-	610	-	550	
150HD27.5	10(7.5)	6"(150)	3	DOL	17	1.5	90	10	-	81	286	-	610	-	550	
100HD211	15(11)	4"(100)	3	DOL	36	1.0	60	10	-	125	330	-	700	-	642	
100HD215	20(15)	4"(100)	3	DOL	46	1.0	60	10	-	134	330	-	700	-	642	
150HD211	15(11)	6"(150)	3	DOL	26.5	1.5	90	10	-	124	330	-	700	-	642	
150HD215	20(15)	6"(150)	3	DOL	35	1.5	90	10	-	133	330	-	700	-	642	

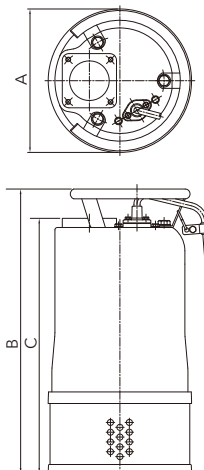



HDG 2-5HP




HDG 7.5-10HP

HDG

FEATURES

- Optimizing HDG series designed with hardened ductile cast iron (FCD-700) agitator, for maximum stirring and pump action for slurry applications.
- Standard accessories include: cable with an epoxy resin sealed water-resistant cable base, Auto-cut motor protector, double mechanical seals, oil seal design, and High Solid Epoxy coating.
- High efficient special impeller design in High Chrome Alloy steel (HiCrFC), with a hardness of 55 - 60 Rockwell, to stand high abrasive applications.

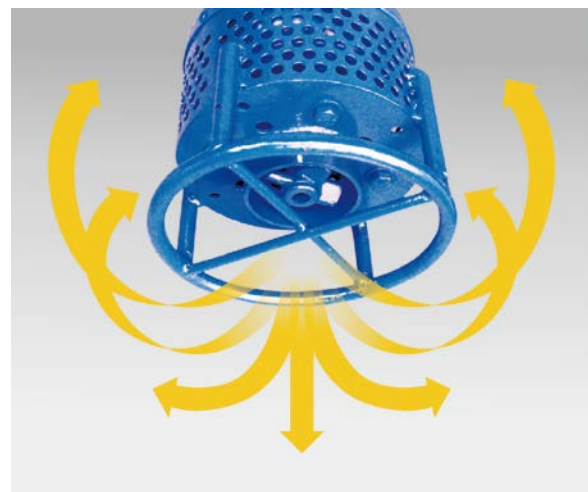


APPLICATIONS

- Civil engineering, dewatering, tunneling, groundworks, mining, and manhole sewer.
- Industrial wastewater dewatering of fluids containing solid sediments.
- Portable use for contractors, installers, and industry.


PRODUCT NOMENCLATURE

80	HDG	2	1.5
Discharge mm	Type	Pole	kW

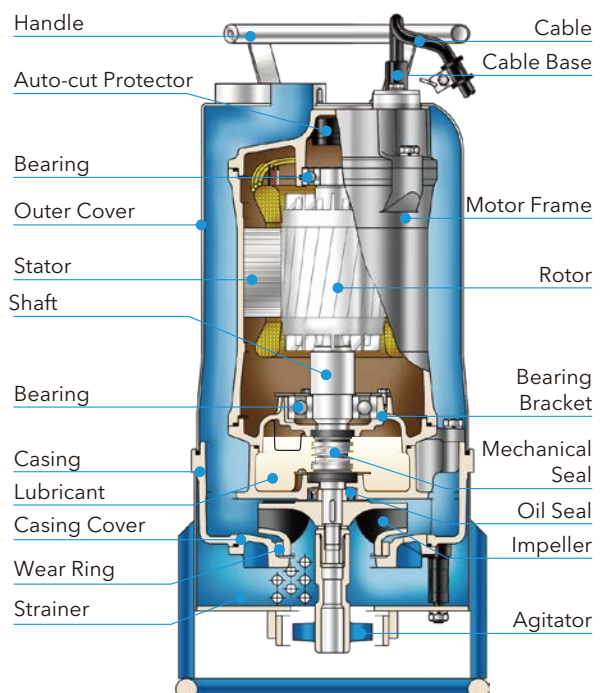



PERFORMANCE CURVES

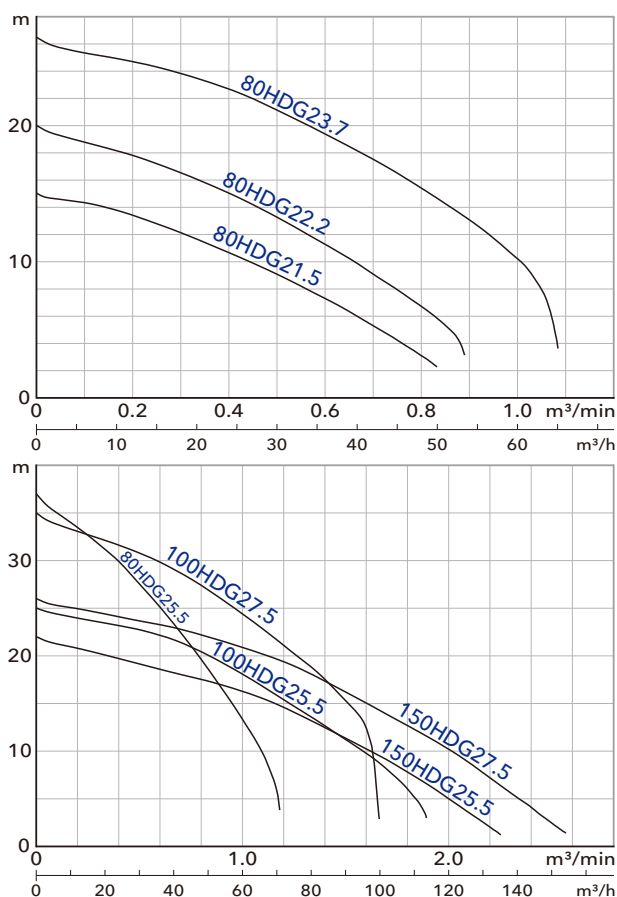



SPECIFICATIONS

Item		Description
Limits of Use	Liquid Temp.	0~40°C (32~104°F)
	Applications	Dewatering Fluids Contain Solid Sediment
Type	Frequency	50Hz
	Motor	2P (3000rpm) • Dry Motor
	Insulation	Class F (2~5HP) • Class H (7.5~10HP)
	Protection	IP68
	Protector	Auto-cut
	Bearing	Ball type
	M.seal	Double M.seals
	Impeller	Open • Close
Material	Outer cover	SUS304
	Upper Cover	FC200
	Motor Frame	FC200
	Shaft	SUS403 (2~3HP) • SUS304 (5~10HP)
	M.seal	CA/CE & SiC/SiC
	Casing	FC200
	Impeller	HiCrFC
	Wear plate	HiCrFC (For Open)
	Wear ring	HiCrFC (For Close)
	Agitator	FCD700
	Cable	VCT or H07RN-F
Optional		Pumps can be customized to fit specifications

PERFORMANCE SPECS.

※ Note : Weight Without Cable & Outlet.

Model	Output HP(kW)	Discharge Inch(mm)	Phase Ø	Start Method	Head m	Standard		Solid Passage mm	Weight kg		Dimensions mm					
						m³/min	m³/h		1Ø	3Ø	A	B		C		
80HDG21.5	2(1.5)	3"(80)	1/3	Capacitor DOL	9	0.5	30	10	41	36	260	592	547	546	502	
80HDG22.2	3(2.2)	3"(80)	1/3	Capacitor DOL	13	0.5	30	10	45	40	260	622	547	577	502	
80HDG23.7	5(3.7)	3"(80)	3	DOL	21	0.5	30	10	-	45	260	-	577	-	532	
80HDG25.5	7.5(5.5)	3"(80)	3	DOL	27	0.5	30	10	-	73	318	-	683	-	623	
100HDG25.5	7.5(5.5)	4"(100)	3	DOL	18	1.0	60	10	-	76	318	-	683	-	623	
150HDG25.5	7.5(5.5)	6"(150)	3	DOL	11	1.5	90	10	-	79	318	-	683	-	623	
100HDG27.5	10(7.5)	4"(100)	3	DOL	24.5	1.0	60	10	-	81	318	-	683	-	623	
150HDG27.5	10(7.5)	6"(150)	3	DOL	16	1.5	90	10	-	82	318	-	683	-	623	





BD 30HP



ADTC


BD

FEATURES

- Compact, robust and easy handling for all construction and civil engineering dewatering application conditions.
- SPHC double outer casing, water cooling motor for continuous duty, and low water level conditions.
- High efficient special impeller design in High Chrome Alloy steel (HiCrFC), with a hardness of 55 - 60 Rockwell, to stand high abrasive applications.
- The mechanical seal bracket is covered by EPDM with anti-abrasive wear. The casing is heat-treated nodular cast iron (FCD500) and the wear plate is made of high chrome alloy steel (HiCrFC) to resist the intensive abrasiveness of sand and gravel.
- Standard accessories include the cable with an epoxy resin sealed water-resistant cable base, Auto-cut motor protector, double mechanical seals, oil seal design, and High Solid Epoxy coating.
- Optional ADTC (Adapter Connection) Casing to connect suction with inline pipe, allowing surface/ inline/deep well pumping.



Close Impeller

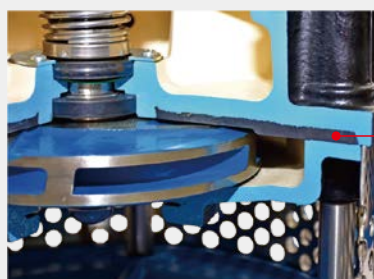


EPDM

APPLICATIONS

- Dewatering for Civil engineering, tunneling, groundworks, mining and manhole sewer, and infrastructure construction, etc.
- River restoration, Dredging ditch drainage.
- Hyporheic flow construction work.
- Cooling water system in steel mill quenching process.



PRODUCT NOMENCLATURE

150(200)	BD	2	22
Discharge mm	Type	Pole	kW

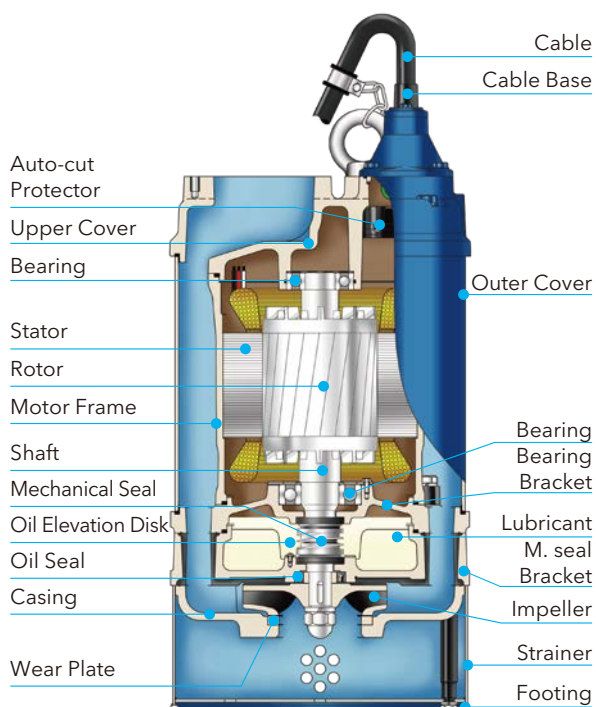



PERFORMANCE CURVES

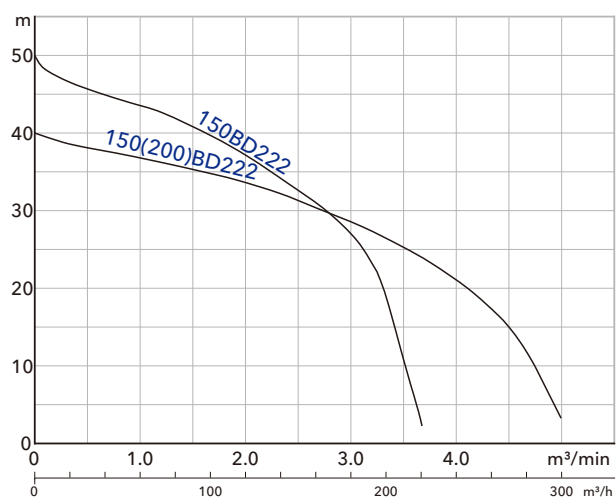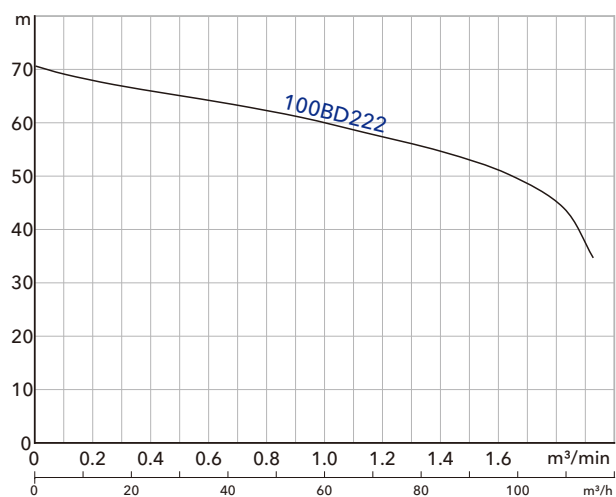


SPECIFICATIONS

Item		Description
Limits of Use	Liquid Temp.	0~40°C (32~104°F)
	Applications	Construction sites • Basins dewatering
Type	Frequency	50Hz
	Motor	2P(3000rpm) • Dry Motor
	Insulation	Class H
	Protection	IP68
	Protector	Auto-cut
	Bearing	Ball type
	M.seal	Double M.seals
	Impeller	Close
Material	Outer cover	SPHC
	Upper Cover	FC200
	Motor Frame	FC200
	Shaft	SUS420J2
	M.seal	CA/CE & SiC/SiC
	Casing+ Wear Plate	FCD500+HiCrFC
	Impeller	HiCrFC
	Wear Plate	HiCrFC
	Cable	VCT or H07RN-F
	Optional	Pumps can be customized to fit specifications

PERFORMANCE SPECS.

Model	Output HP(kW)	Discharge Inch(mm)	Phase Ø	Start Method	Head m	Standard		Solid Passage mm	Weight kg 3Ø	Dimensions mm		
						m³/min	m³/h			A	B	C
100BD222	30(22)	4"(100)	3	DOL	59	1.0	60	10	226	403	813	721
150BD222	30(22)	6"(150)	3	DOL	37	2.0	120	10	224	403	813	721
150(200)BD222	30(22)	6"(150)	3	DOL	33	2.0	120	20	225	403	813	721
		8"(200)			20.5	4.0	240					


※ Note : Weight Without Cable & Outlet.

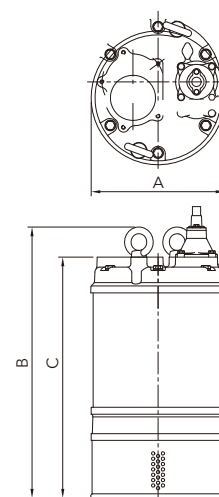

OPTIONAL OUTLET SET

Output HP(kW)	Discharge inch(mm)	Lower PCD*Holes	LOH Hose Connection	LOT Male Thread Connection	LOF Flange Connection	LKF Double Flange Set	LOC Center Line Flange
2(1.5) 5(3.7)	2"(50) 3"(80) 4"(100)	98*4 98*4 98*4	LOH2-98 LOH3-98 LOH4-98	LOT2-98 LOT3-98 LOT4-98	LOF2-120-125*98 LOF3-150-160*98 LOF4-175-190*98	LKF2-120*98 LKF3-150*98 LKF4-175*98	- LOC3-150*98 -
7.5(5.5) 10(7.5)	3"(80) 4"(100) 6"(150)	127*4 127*4 127*4	LOH3-127 LOH4-127 LOH6-127	LOT3-127 LOT4-127 LOT6-127	LOF3-150-160*127 LOF4-175-190*127 LOF6-240*127	LKF3-150*127 LKF4-175*127 LKF6-240*127	LOC3-150*127 - -
15(11) 20(15)	4"(100) 6"(150)	145*4 145*4	LOH4-145 LOH6-145	LOT4-145 LOT6-145	- -	- -	LOC4-175*145 LOC6-240*145
30(22)	4"(100) 6"(150) 8"(200)	185*5 185*5 185*5	LOH4-185 LOH6-185 LOH8-185	LOT4-185 LOT6-185 -	- - -	- - -	- LOC6-240*185 -

※ Pumps require center align could adapt with LOC sets, which can prevent center of gravity(CG) swift under pipe connection, keep dewatering in alignment with pipe arrangement.



PRODUCT NOMENCLATURE

LOH 4 - 98
Type Discharge PCD

LOF 4 - 175 - 190 * 98
Type Discharge PCD PCD
(upper flange) (lower flange)

ACCESSORIES : ADAPTER

ADTC (Adapter Connection) Pump model, can be applied with flange type adapter or check valve is an optional accessory for groundwater, deep well or wellpoint dewatering applications.



ADT

Adapter Connection (ADTC)

OPTIONAL ADTC (ADAPTER CONNECTION) CASING

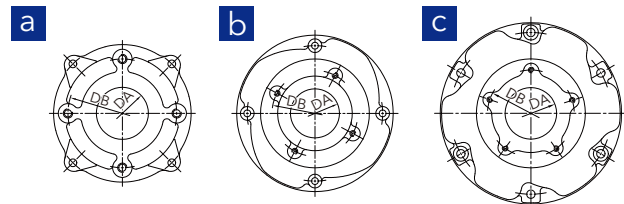


Figure	Model	mm		Bolt Size	Screw Number
		DA	DB		
a	80HD21.5/22.2/23.7	67	140	M12*25L	4
a	100HD23.7	80	150	M12*25L	4
a	100HD25.5/27.5	87	150	M12*25L	4
a	150HD25.5/27.5	97	175	M12*25L	4
b	150HD211	100	175	M12*30L	4
b	100/150HD215	100	175	M12*30L	4
b	100BD222	100	175	M12*30L	4
b	150BD222	110	175	M12*35L	4
c	150(200)BD222	120	185	M12*35L	5

PRODUCT FEATURES



Epoxy Cable Base

An epoxy resin seal cable base prevents moisture from entering the motor through the core wires.



Double Mechanical Seals

Superior abrasion resistant mechanical seal is manufactured with silicon carbide to ensure the best seal effect.



Auto-cut Protector

Automatic On/Off motor protector to prevent motor burn out due to high temperature and excess amperage draw. The Protector can revert when the motor temperature returns to normal.



High Efficiency Dry Motors

All stator coils are treated with insulating vanish procedures to achieve the best insulation, efficiency and durability.



Professionalism • Innovation • Service • Commitment
HCP PUMP MANUFACTURER CO., LTD.
www.hcppump.com



Distributor: