
Hydrophore tank-*HYDROPLAST*

Execution :

- Steel tank for water and air ***GALVA + PE-lining***
- Approved for potable water.
- Horizontal or vertical pressure vessel
- Design Pressure 8 bar – Test Pressure 12 bar
- Temperature : -10°C / +50°C
- Conformity with Pressure Equipment Directive 2014-68-EU (PED)
- Hot dip galvanized according EN ISO 1461 + internally plasticized PE
- Horizontal execution : with (universal) pump support

HORIZONTAL :

Type	Volume	ø Dia	Length	A
HH-200-8-HP-ECO	200 L	500	1180	1"F
HH-300-8-HP-ECO	300 L	600	1310	5/4"F

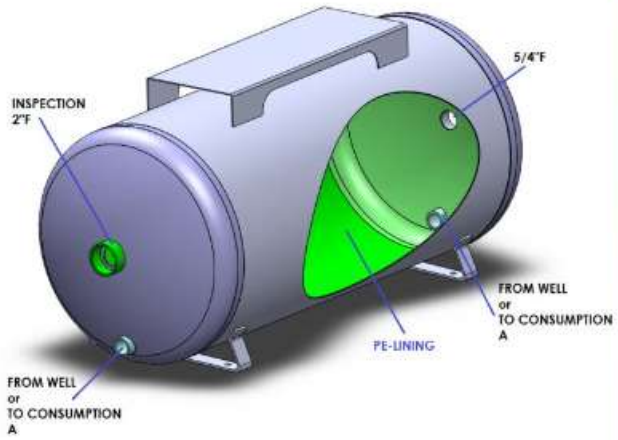




Prinsalbertlaan 111 - 8870 Izegem
info@pompenreynaert.com
hydroplast drukvaten

VERTICAL :

Type	Volume	ø Dia	Height	A
HV-100-8-HP	100 L	380	1120	1"F
HV-200-8-HP	200 L	500	1250	5/4"F
HV-300-8-HP	300 L	600	1390	5/4"F
HV-500-8-HP	500 L	600	1990	2"F

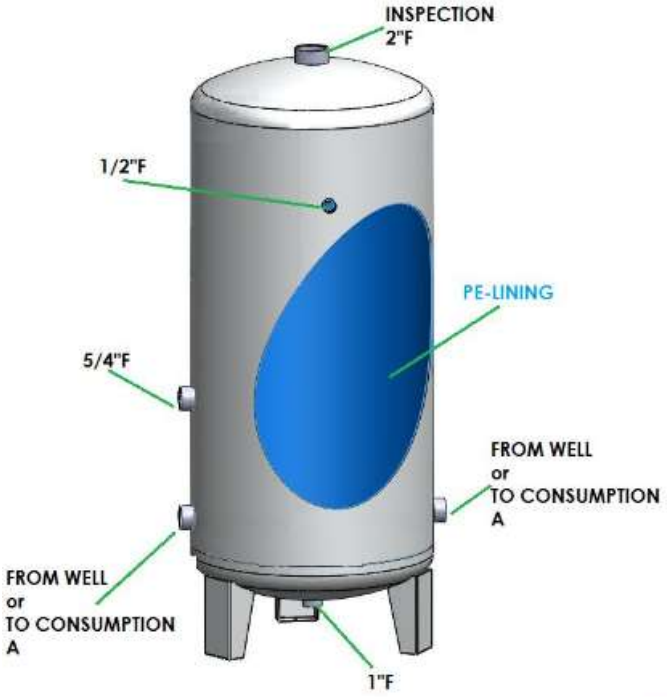



- 8 Bar
- Galva + Poly-ethylene-lining
- Drinking water approved

Prinsalbertlaan 111 - 8870 Izegem
info@pompenreynaert.com
hydroplast drukvaten