

Hydrophore tank-*STEELPEX*

Execution :

- Steel tank for hydrophore ***COMPLETELY PLASTICIZED – PE-LINING***
- Approved for potable water, UV, corrosion and chemical resistant.
- Vertical pressure vessel for fresh water
- Design Pressure 9 bar – Test Pressure 13 bar
- Temperature : -10°C / +60°C
- Conformity with Pressure Equipment Directive 2014-68-EU (PED)
- Connections: 5/4"F or 50 mm PVC + 3 x ½"F + drain ½"F

Type	Volume	ø Dia	Length/Height	Left/right	top/bottom
HV-200-9-STEELPEX	200 L	500	1455	-	DN 100
HV-300-9-STEELPEX	300 L	600	1600	-	DN 100

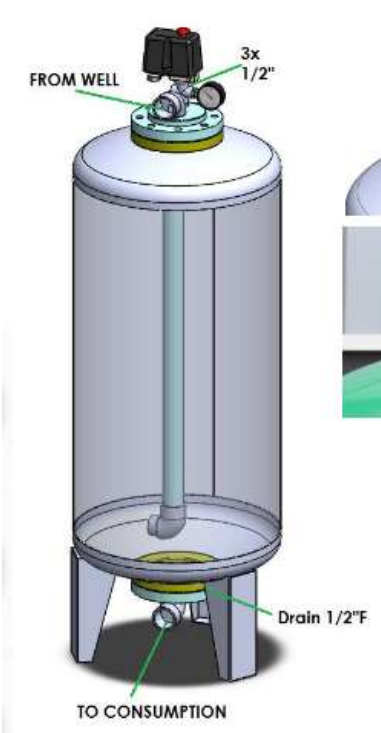

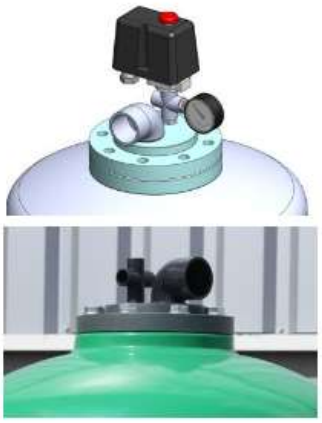



2x2"F




Prinsalbertlaan 111 - 8870 Izegem
info@pompenreynaert.com
steelpex drukvaten

Hydrophore tank-*STEELPEX*

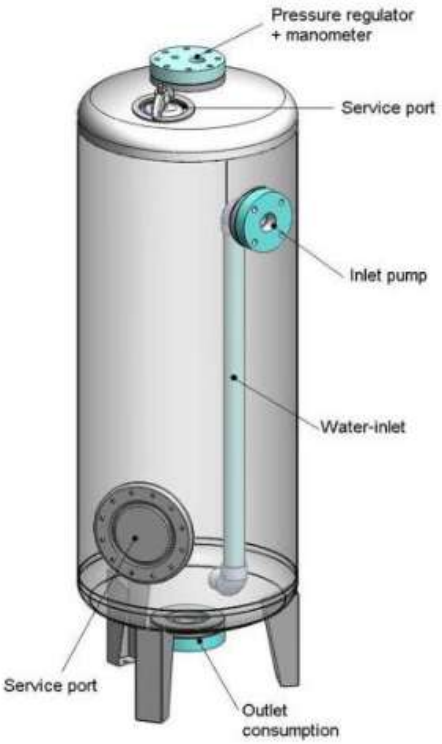







- **Flange adaptors PVC,**
  - DN 65 – 2"
  - DN 100 – 2"
  - DN 100 - 3",
  - DN 100 – ½"+ 6/4"
  - DN 100 -1"
  - DN 100 – 2x2"

Type	ø Dia	Cilindr. Height	Volume Liter	Total Height	Weight Kg	Top flange	Bottom flange	Side flange	Inspection port (n°)	lateral service port	Central top manhole
HV-50-TBS	500	1500	320 L	1990	80kg	DN100	DN100	DN65	-----	handhole 2	-----
HV-65-TBS	650	1400	520 L	1960	110kg	DN100	DN100	DN65	handhole 1	DN 200	-----
HV-75-TBS	750	1500	760 L	2090	155kg	DN100	DN100	DN65	handhole 1	DN 200	-----
HV-80-TBS	800	1700	975 L	2420	175kg	DN100	DN100	DN65	handhole 1	DN 200	-----
HV-90-TBS	900	1800	1300 L	2580	290kg	DN100	DN100	DN100	handhole 1	DN 200	-----
HV-100-TBS	1000	1800	1650 L	2600	330kg	DN100	DN100	DN100	handhole 1	DN 200	-----
HV-110-TBS	1100	1800	2000 L	2630	370kg	DN100	DN100	DN100	handhole 1	DN 200	-----
HV-125-TBS	1250	1800	2775 L	3000	560kg	DN100	DN100	DN100	handhole 1	DN 200	DN 400

Prinsalbertlaan 111 - 8870 Izegem
info@pompenreynaert.com
steelpex drukvaten